


PRODUCT SPECIFICATIONS

AC6FF Cat 6A F/FTP Euroclass Cca Cables

AC6FF Cat 6A F/FTP Euroclass Cca Cables

APPLICATION

Leviton Cat 6A F/FTP cables exceed Category 6A performance standards. They are rated to 500 MHz and are suitable for use in all Class E_A structured cable systems. The applications supported include 10 Gigabit Ethernet, Gigabit Ethernet, Power over Ethernet (PoE), and broadband video transmissions at frequencies up to 500 MHz.

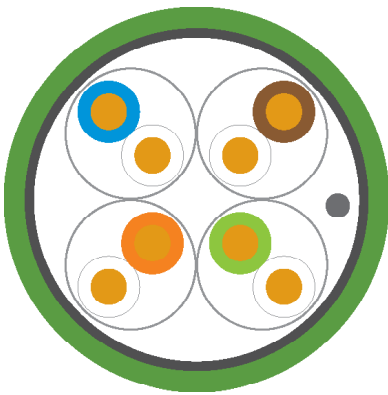

COUNTRY OF ORIGIN

UK

WARRANTY INFORMATION

For Leviton product warranties, go to [Leviton.com/ns/warranty](https://leviton.com/ns/warranty)

FEATURES & BENEFITS

- 23 AWG solid annealed copper wire
- 4 twisted pairs individually screened and cabled together, providing excellent EMI immunity
- Overall aluminum polyester screen for improved shielding efficiency and increased heat dissipation
- Designed to support all Class E_A protocols including 10GBASE-T
- Halogen Free Flame Retardant – Low Smoke (HFFR-LS)
- Enhanced HFFR-LS material meets the requirements of the Construction Products Regulation (CPR) Euroclass Cca
- CE marked for CPR
- Delivered in 100% recyclable packaging
- Designed and manufactured in Leviton's carbon neutral UK facility

STANDARDS & REGULATIONS

- ISO/IEC 11801 Class E_A
- IEC 61156-5
- EN 50173-1
- EN 50288-10-1
- ANSI/TIA 568.2
- 10GBASE-T
- 802.11ac wireless
- IEEE 802.3 PoE Type 1, 2, 3, 4 (100 watts max)
- Cisco UPOE, UPOE+ (90 watts max)
- Power over HDBaseT™ PoH (95 watts max)

PRODUCT SPECIFICATIONS

AC6FF Cat 6A F/FTP Euroclass Cca Cables

TECHNICAL SPECIFICATIONS

Primary Electrical Parameters	Specification	Typical Performance
Conductor loop resistance	Max 19 Ω /100 m	14 Ω /100 m
Conductor resistance unbalance	Max. 2 %	0.1 %
Insulation resistance	>5 G Ω · km	>50 G Ω · km
Dielectric strength	2500 V DC for 2 s	Pass
Secondary Electrical Parameters		
Propagation delay	<534 ns/100 m @ 100 MHz	413 ns/100 m @ 100 MHz
Delay skew	Max. 45 ns/100 m @ 100 MHz	4 ns/100 m @ 100 MHz
Mean characteristic impedance	100 Ω +/- 5 Ω @ 100 MHz	100 Ω $\pm$ 3 Ω @ 100 MHz
Coupling attenuation	Type 1b	84 dB
Transfer impedance	Grade 2	11 m Ω /m @ 10 MHz

MECHANICAL SPECIFICATIONS

Usage Characteristics	
Category	Cat 6A
Type of cable	F/FTP
Temp. (Installation)	0 °C to +50 °C (32 °F to +122 °F)
Temp. (Operating)	-20 °C to +75 °C (-4 °F to +167 °F)

TECHNICAL DATA - PHYSICAL

Max. tensile load (Installation)	10kg
Segregation class	Class D
Min. bend radius (Installation)	8 x Outer Diameter
Min. bend radius (Operation)	4 x Outer Diameter
Field test NVP value	0.80

REACTION TO FIRE

Characteristic	IEC Standard	EN Standard	CPR Rating
Classification / EuroClass	—	EN 13501-6	Cca s1a d1 a1
Single Cable Flame Rating	IEC 60332-1-2	—	—
Smoke Production	—	EN 50399	s1a
Flaming Droplets/Particles	—	EN 50399	d1
Acid Gas Emission/Acidity	—	EN 50267-2-3	a1

PRODUCT SPECIFICATIONS

AC6FF Cat 6A F/FTP Euroclass Cca Cables

PRODUCT PERFORMANCE TRANSMISSION CHARACTERISTICS

Freq. MHz	IL (dB)		NEXT (dB)		PSNEXT (dB)		ACRF (dB)		PSACRF (dB)	
	Standard	Typical	Standard	Typical	Standard	Typical	Standard	Typical	Standard	Typical
1	2.1	1.9	75.3	100.0	72.3	97.0	68.0	90.0	65.0	87.0
4	3.8	3.5	66.3	100.0	63.3	97.0	56.0	90.0	53.0	87.0
10	5.9	5.5	60.3	100.0	57.3	97.0	48.0	90.0	45.0	87.0
20	8.4	7.8	55.8	100.0	52.8	97.0	42.0	84.8	39.0	81.8
100	19.1	18.0	45.3	94.3	42.3	91.3	28.0	70.8	25.0	67.8
200	27.6	26.1	40.8	88.9	37.8	85.9	22.0	64.8	19.0	61.8
250	31.1	29.4	39.3	87.1	36.3	84.1	20.0	62.8	17.0	59.8
500	45.3	43.0	34.8	81.7	31.8	78.7	14.0	56.8	11.0	53.8
550	—	45.4	—	81.0	—	78.0	—	56.0	—	53.0

Note: The standard values shown are the most demanding taken from the relevant IEC, TIA and EN specifications.
These standard values are the maximum permissible for Insertion loss and the minimum permissible for other parameters

PRODUCT PERFORMANCE TRANSMISSION CHARACTERISTICS, CONTINUED

Freq. MHz	RL (dB)		PSANEXT (dB)		PSAACRF (dB)	
	Standard	Typical	Standard	Typical	Standard	Typical
1	20.0	27.0	67.0	100.0	67.0	98.1
4	23.0	30.0	67.0	100.0	66.2	96.5
10	25.0	30.0	67.0	100.0	58.2	94.5
20	25.0	30.0	67.0	100.0	52.2	92.2
100	20.1	25.1	62.5	100.0	38.2	82.0
200	18.0	23.0	58.0	100.0	32.2	73.9
250	17.3	22.3	56.5	100.0	30.2	70.6
500	17.3	20.2	52.0	100.0	24.2	57.0
550	—	19.9	—	100.0	—	54.6

Note: The standard values shown are the most demanding taken from the relevant IEC, TIA and EN specifications.
These standard values are the maximum permissible for Insertion loss and the minimum permissible for other parameters

STANDARD PACKAGING SPECIFICATIONS - REELS

Part No.	Packaging Length (m)	Color	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Reel Size Flange Dia. x Width (mm)	Gross Weight (kg/Item)	Items Per Pallet
AC6F/FTP-Cca-500GN	500	Green †	7.0	50.2	400 x 390	27.5	12
AC6F/FTP-Cca-1000GN	1000	Green †	7.0	50.2	600 x 325	55.9	6
AC6F/FTP-Cca-D500GN ††	500	Green †	7.1 x 14.3	102.4	600 x 325	57.7	6

† Also available in a range of non standard color
†† 'D' denotes Duplex Cable

STANDARD PACKAGING SPECIFICATIONS - BOXES

Part No.	Packaging Length (m)	Color	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Box Size H x W x L	Gross Weight (kg/Item)	Items Per Pallet
AC6F/FTP-Cca-B305GN	305	Green †	7.0	50.2	475 x 295 x 475	16.0	12

† Also available in a range of non standard color

For further support information, visit Leviton.com/ns/support

Page 3 of 3

USA
Network Solutions Headquarters
+1 (800) 722 2082
infoUSA@leviton.com

BERK-TEK™ Cable
+1 (800) 237 5835 | infoUSA@leviton.com

Asia Pacific
+852 3620 2602
infoAPAC@leviton.com

Canada
+1 (800) 461 2002
infoCanada@leviton.com

Europe
+44 (0) 1592 772124
infoEurope@leviton.com

Latin America
MX: +52 (55) 2128 6286
LATAM: +52 (55) 2333 5963
infoLATAM@leviton.com

Middle East & Africa
+971 (4) 247 9800
infoMEA@leviton.com

NETWORK SOLUTIONS PRODUCTS ARE AVAILABLE WORLDWIDE IN OVER 100 COUNTRIES. VISIT US ONLINE AT LEVITON.COM/NS TO LEARN MORE.